




# KIH GREEN PVC SUCTION

*Keeping You Connected*

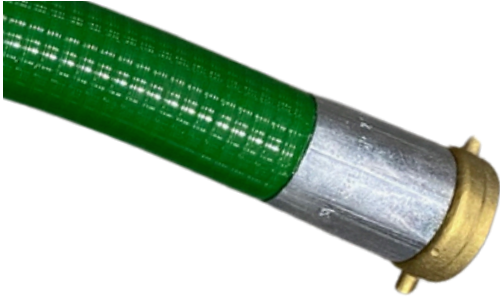

**Application:** For use in suction and discharge in construction and city water services settings.

**Construction:** Ellipse shaped helix, light weight and highly flexible PVC tube with smooth inner and outer surface.

**Temperature:** -5° F to +140°F

| Part #    | ID<br>in | OD<br>in | Weight<br>lbs/ft | Std Length<br>ft | WP<br>psi | Vacuum<br>Rating<br>in/hg | Min Bend<br>Radius<br>in |
|-----------|----------|----------|------------------|------------------|-----------|---------------------------|--------------------------|
| PVC20-65G | 2        | 2.28     | 0.55             | 100              | 65        | 29                        | 10                       |
| PVC30-55G | 3        | 3.35     | 0.97             | 100              | 55        | 29                        | 12                       |
| PVC40-50G | 4        | 4.45     | 1.71             | 100              | 50        | 29                        | 14                       |

| Standard Size | Camlock              | Water Shank          |
|---------------|----------------------|----------------------|
| 2 x 20        | PVC20-65G-20-2020ACL | PVC20-65G-20-2020AWS |
| 3 x 20        | PVC30-55G-20-3030ACL | PVC30-55G-20-3030AWS |
| 4 x 20        | PVC40-50G-20-4040ACL | PVC40-50G-20-4040AWS |

